


## PMMA Film (UVTAC-GM-50-W)

UVTAC-GM-50-W PMMA Film offers excellent light transmittance, it can block more than 99% ultraviolet ray. Comparing with UVTAC-GG-75-W PMMA film, it offers the glossy surface on one side and matte surface on another side.

The standard width is 1270 mm, the Max. Width is 1360mm, thickness is 50  $\mu$ m (0.05mm). Normally, it is packaged as roll with standard length is 1000 meters/roll.

It is suitable for Lamination, Adhesion, and Heat-molding Processing. Normally, it is laminated on other materials by hot-pressing or adhesion, such as PVC, ASA, ABS, PET, PMMA, Wood, Metal, etc.

UVTAC-GM-50-W PMMA film is used frequently in Reflective Traffic Signs, Reflective Tape, and Protective film of furniture, doors & windows and automobile interiors, etc. It is also suitable for injection process, such as INS/IML, etc.

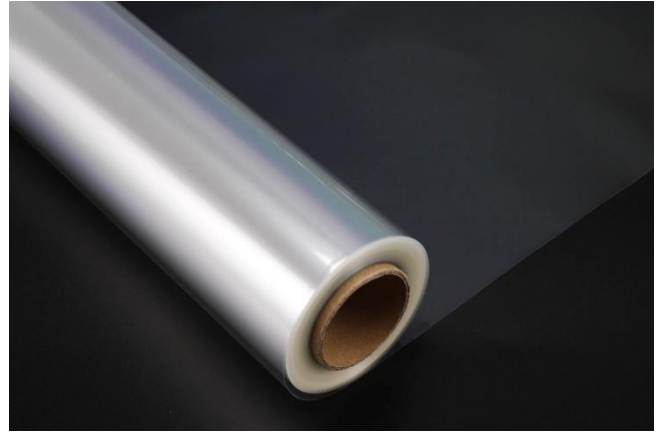

### Model Description

Model	No.	Code	Description
$\begin{array}{cccc} \text{UVTAC} & \text{GM} & \text{50} & \text{W} \\   &   &   &   \\ [1] & [2] & [3] & [4] \end{array}$	1	UVTAC	Product Code;
	2	GM	Glossy surface on one side, Matte surface on another side;
	3	50	Thickness is 50 $\mu$ m (micron);
	4	W	It will have the White Line after folding;

### Technical Parameters

Property	Testing Method	Value	Unit
Thickness	ISO4593	0.050+/-10%	mm
Width	ISO4593	1270+/-1	mm
Max. Width		1360	mm

Density	ISO1183	1.19	g/cm <sup>3</sup>
Surface	Visually	Glossy/Matte	
Elongation at break (MD)	ISO 527-3	>4	%
Elongation at break (TD)	ISO 527-3	>4	%
Tensile strength (MD)	ISO 527-3	>40	MPa
Tensile strength (TD)	ISO 527-3	>40	MPa
Original Light transmittance	ISO 13468-2	>89	%
Original Haze	ISO 13468-2	<38	%
Light transmittance after lamination	ISO 13468-2	>92	%
Haze after lamination	ISO 13468-2	<4	%
UV Blocking rate (280-380nm)	ISO 4593	>99	%
Accelerated aging performance	ISO 4892-2	>6000	Hour
White line after folding	Visually	YES	

## **Contact Us**

Suzhou UVPLASTIC Material Technology Co., Ltd

Add: No. Suite 13-411, Building 13, No.8 Yunxin Road, Huqiu District, Suzhou City, China

Phone/WhatsApp: +86 18118123076

Email: [info@uvplastic.com](mailto:info@uvplastic.com)